




Sustainability curves

Certa Plus 100

Standard port size: DN25/1"
Displacement 0.02 gallons per revolution

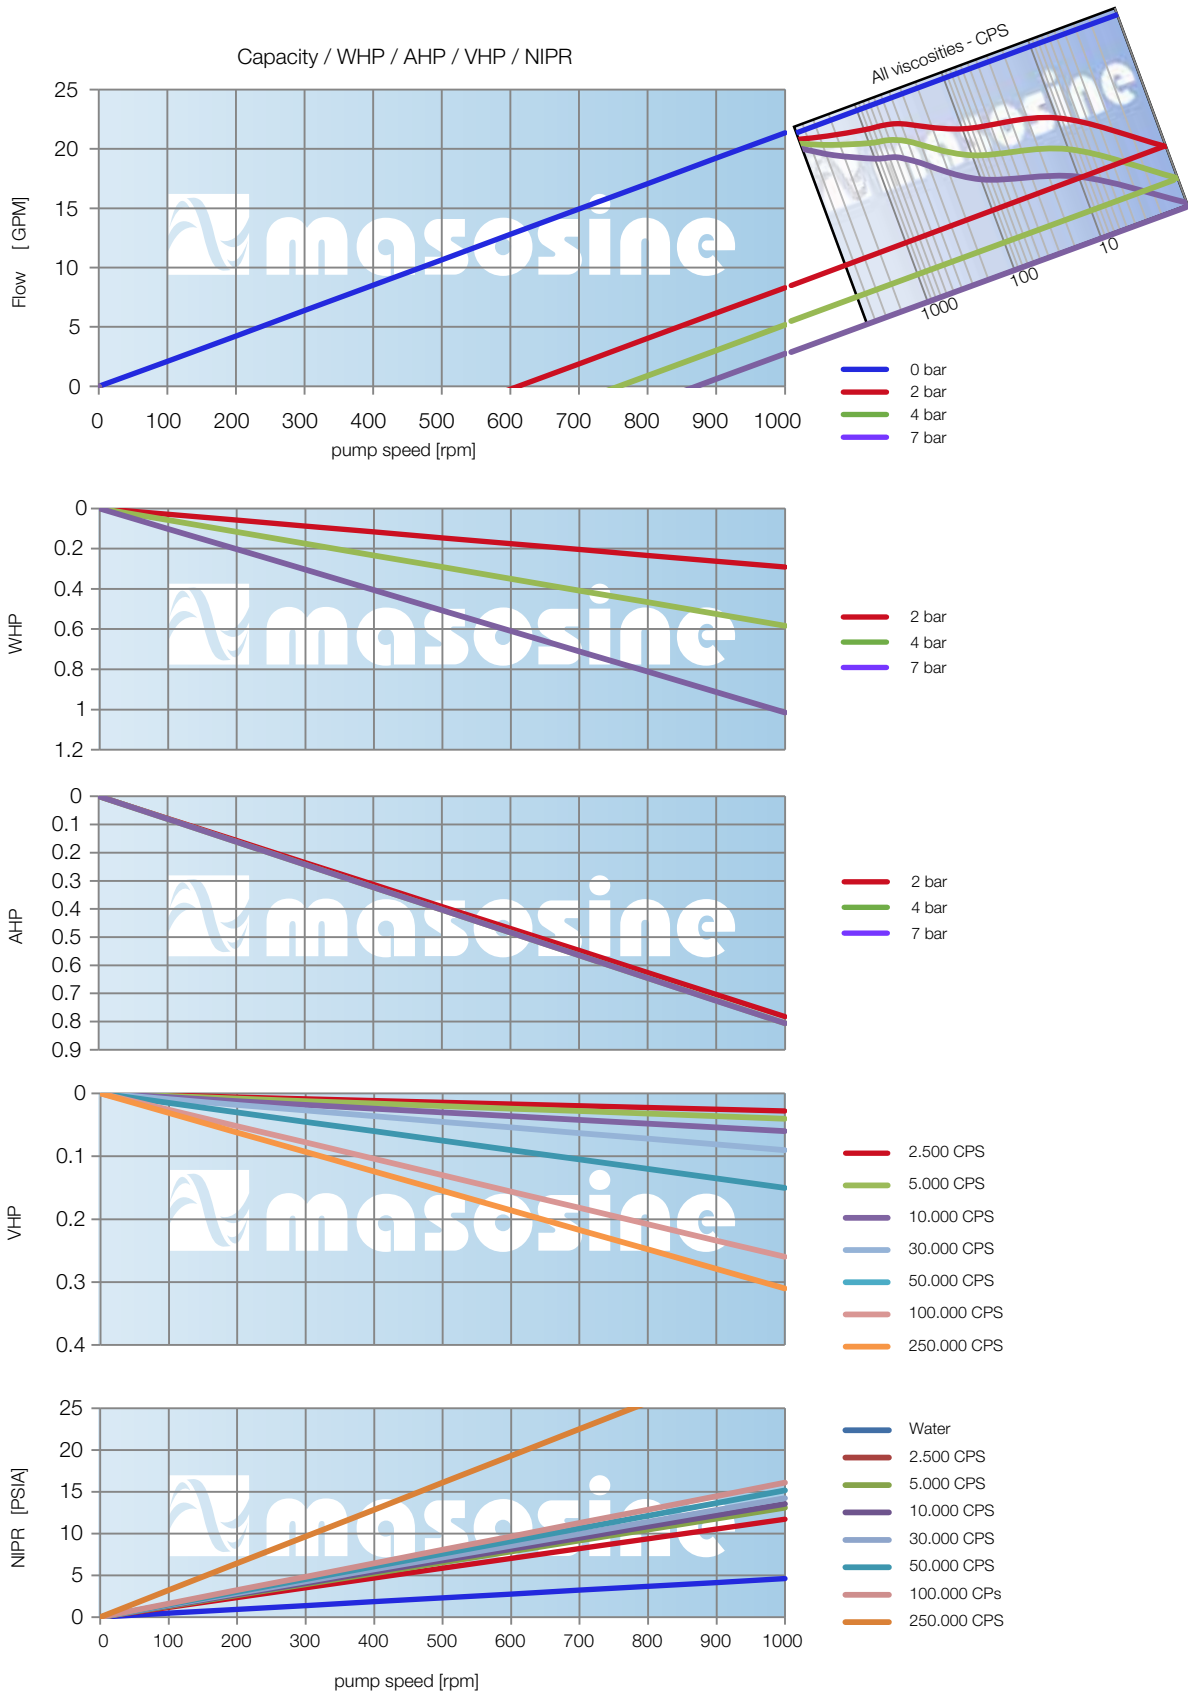




Sustainability curves

Certa Plus 200

Standard port size: DN50/2"
Displacement 0.03 gallons per revolution

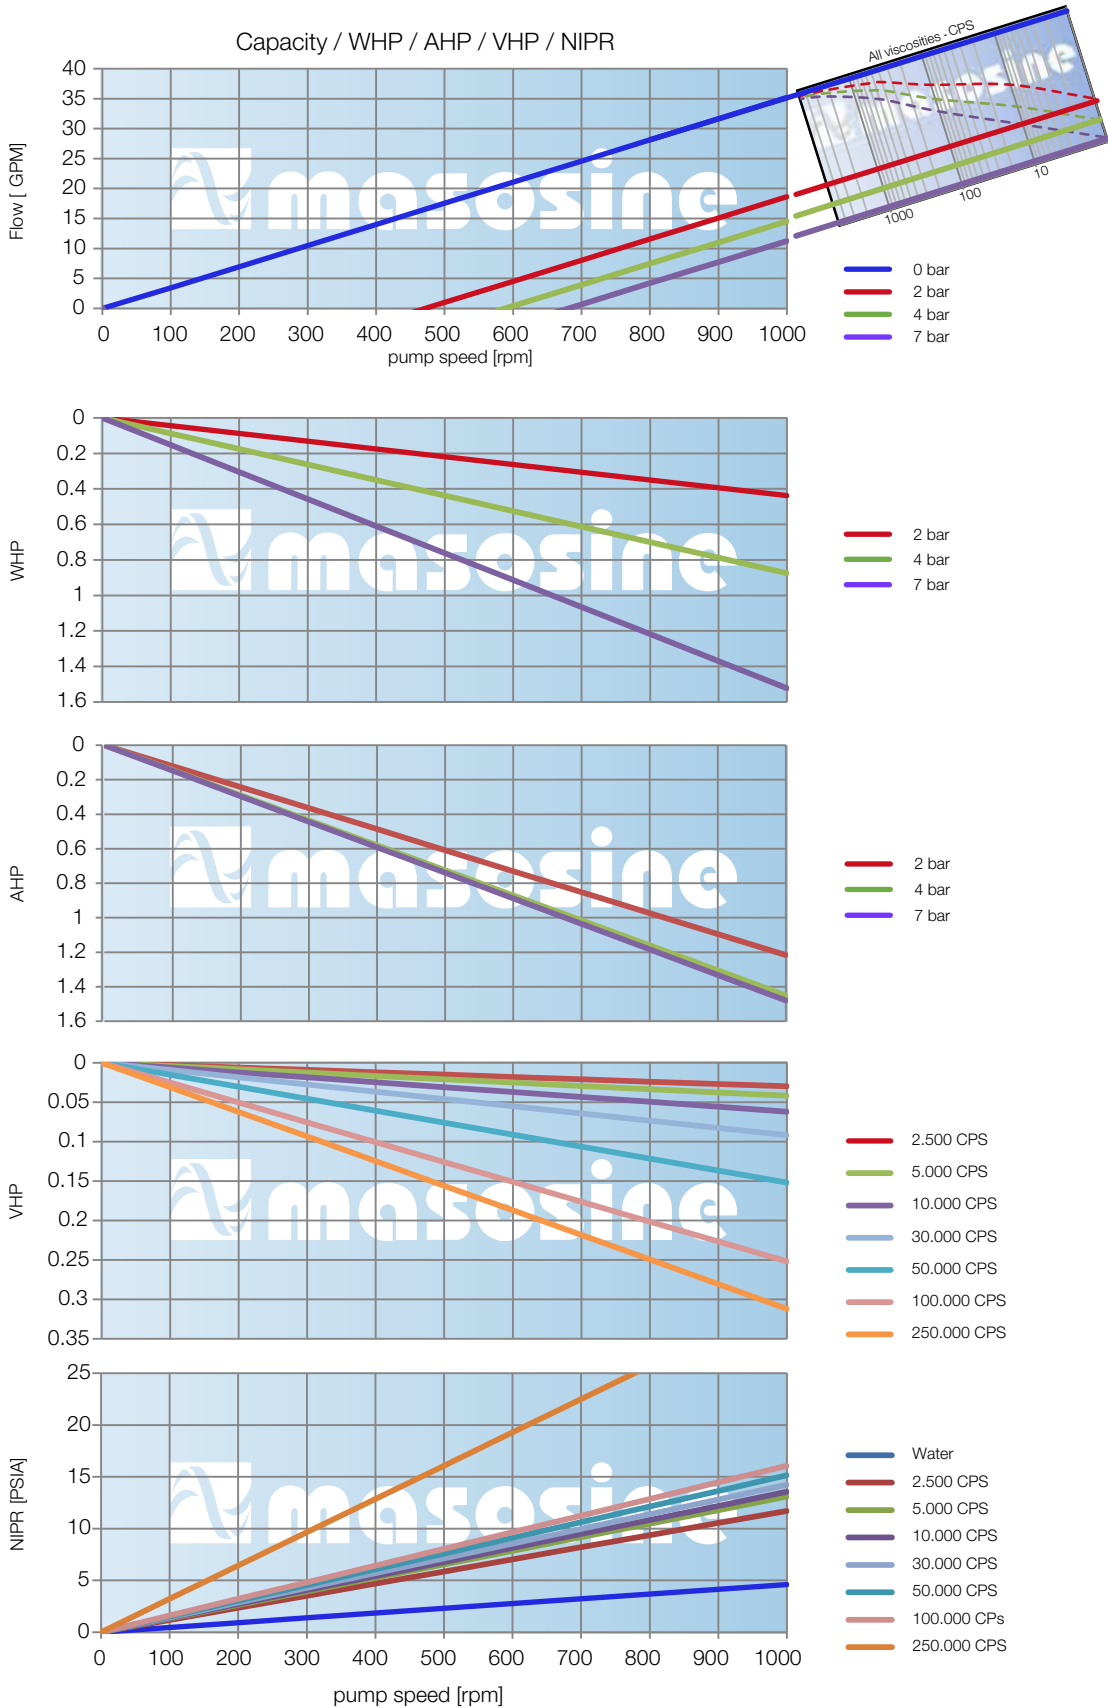








Sustainability curves

Certa Plus 250

Standard port size: DN65/2,5"
Displacement 0.06 gallons per revolution

Capacity / WHP / AHP / VHP / NIPR

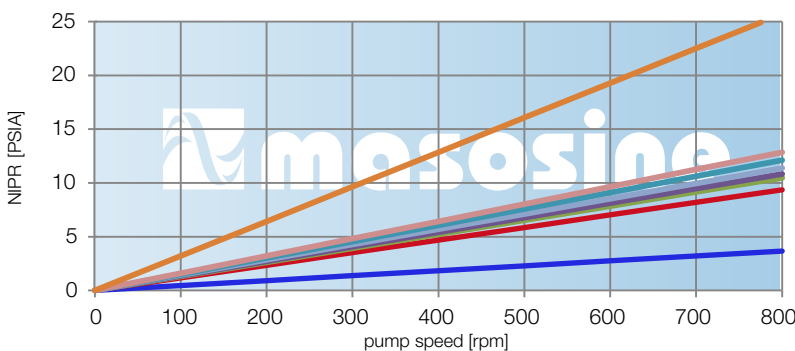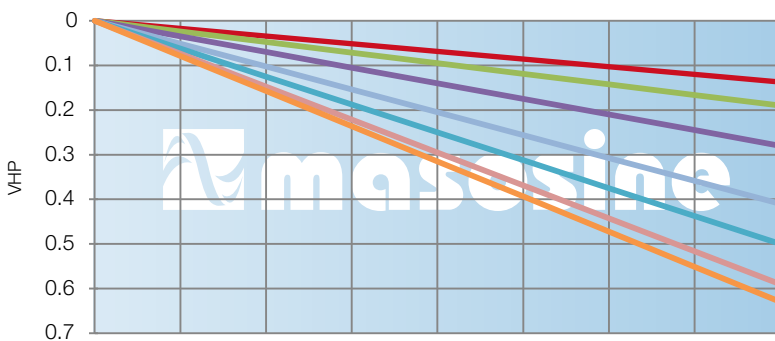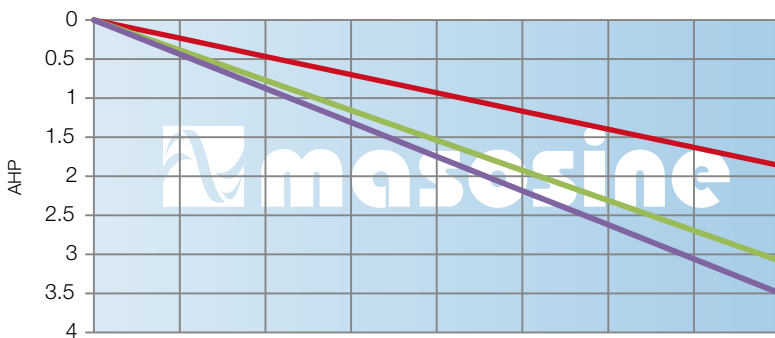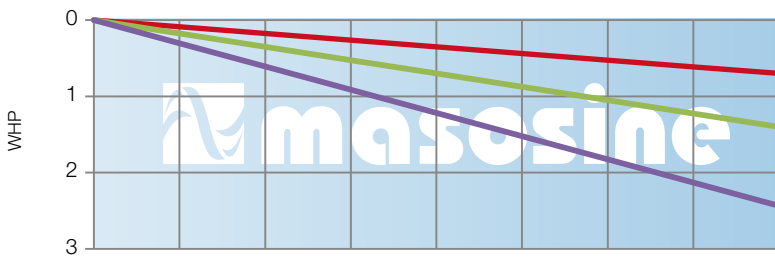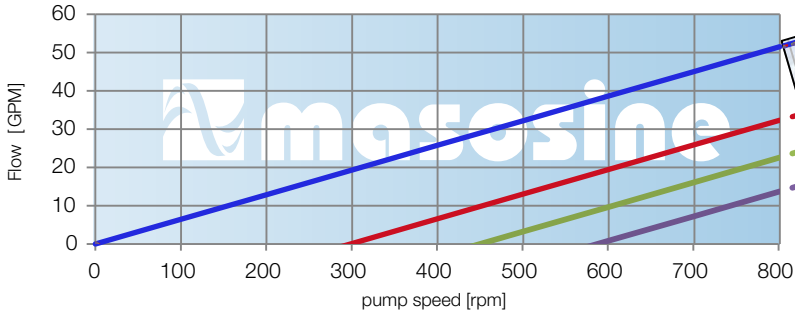




Sustainability curves

Certa Plus 300

Standard port size: DN80/3"
Displacement 0.13 gallons per revolution

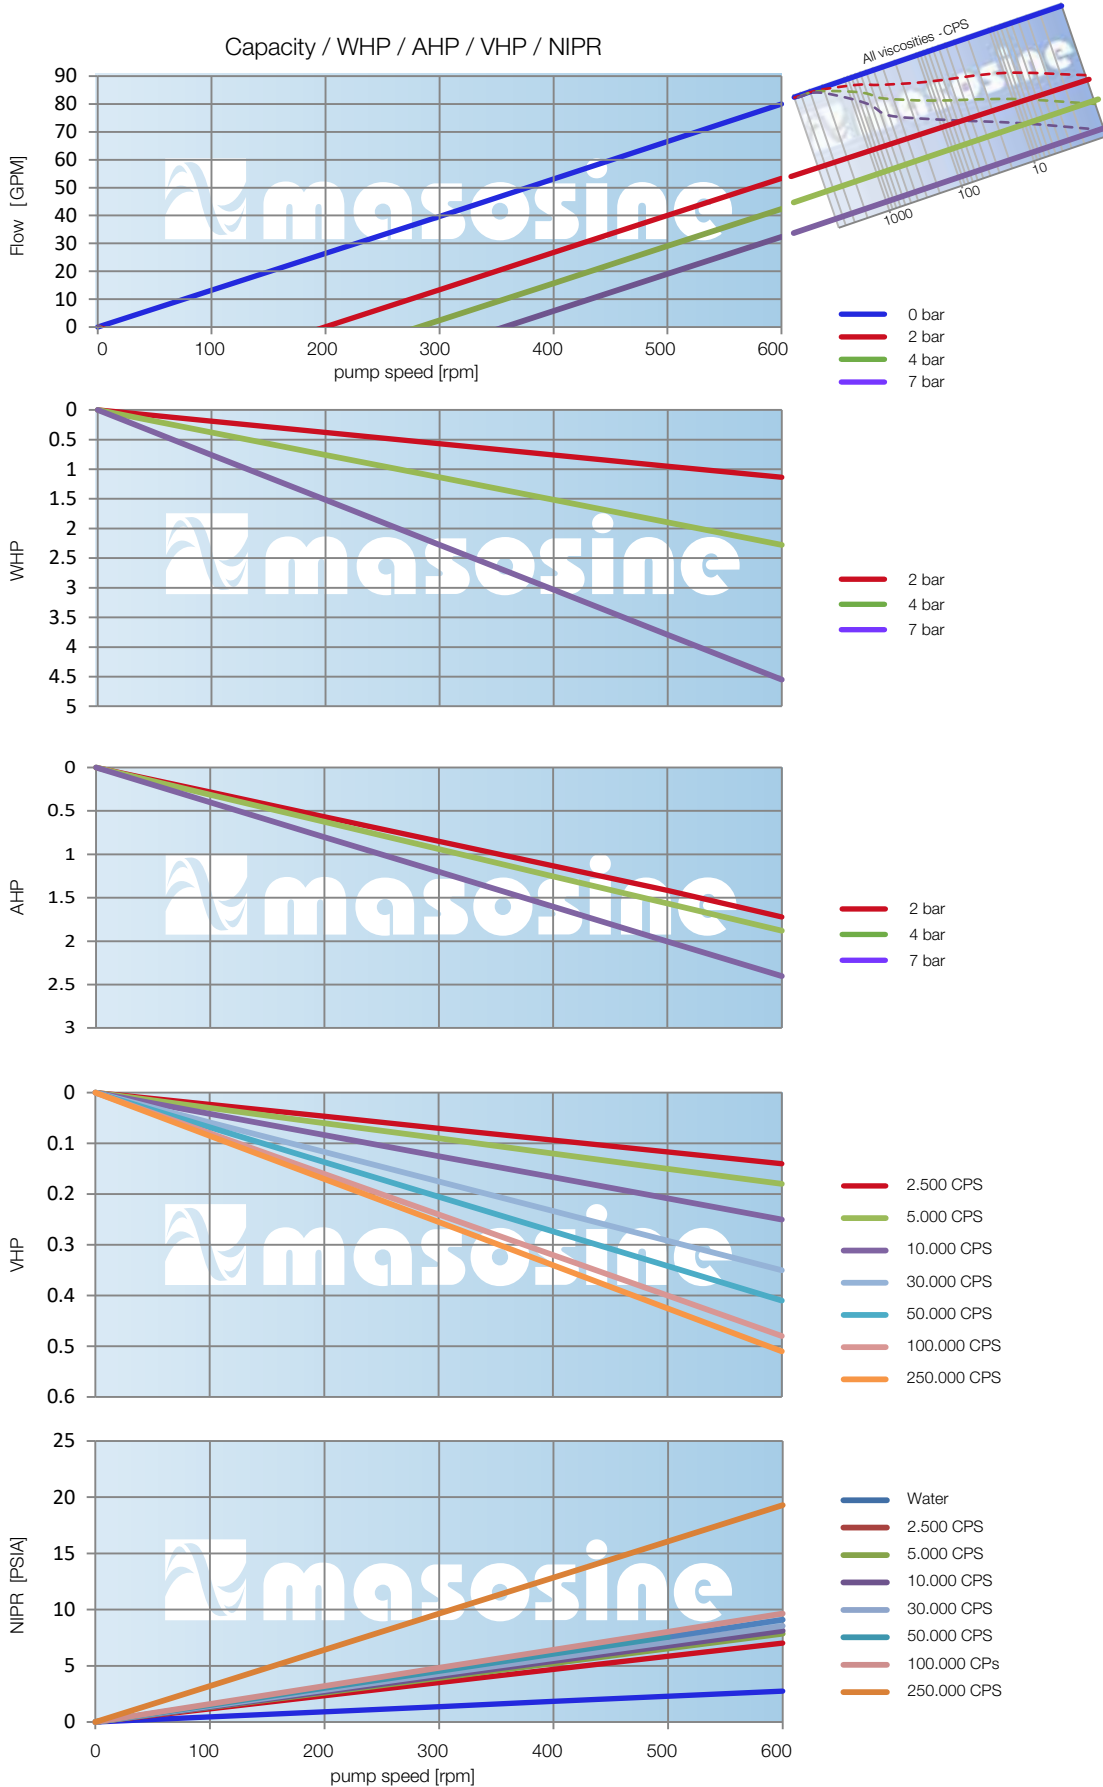



Sustainability curves

Certa Plus 400

Standard port size: DN100/4"
Displacement 0.31 gallons per revolution

