




Sustainability curves

Certa Plus100

Standard port size: DN25/1"
Displacement 0.02 gallons per revolution

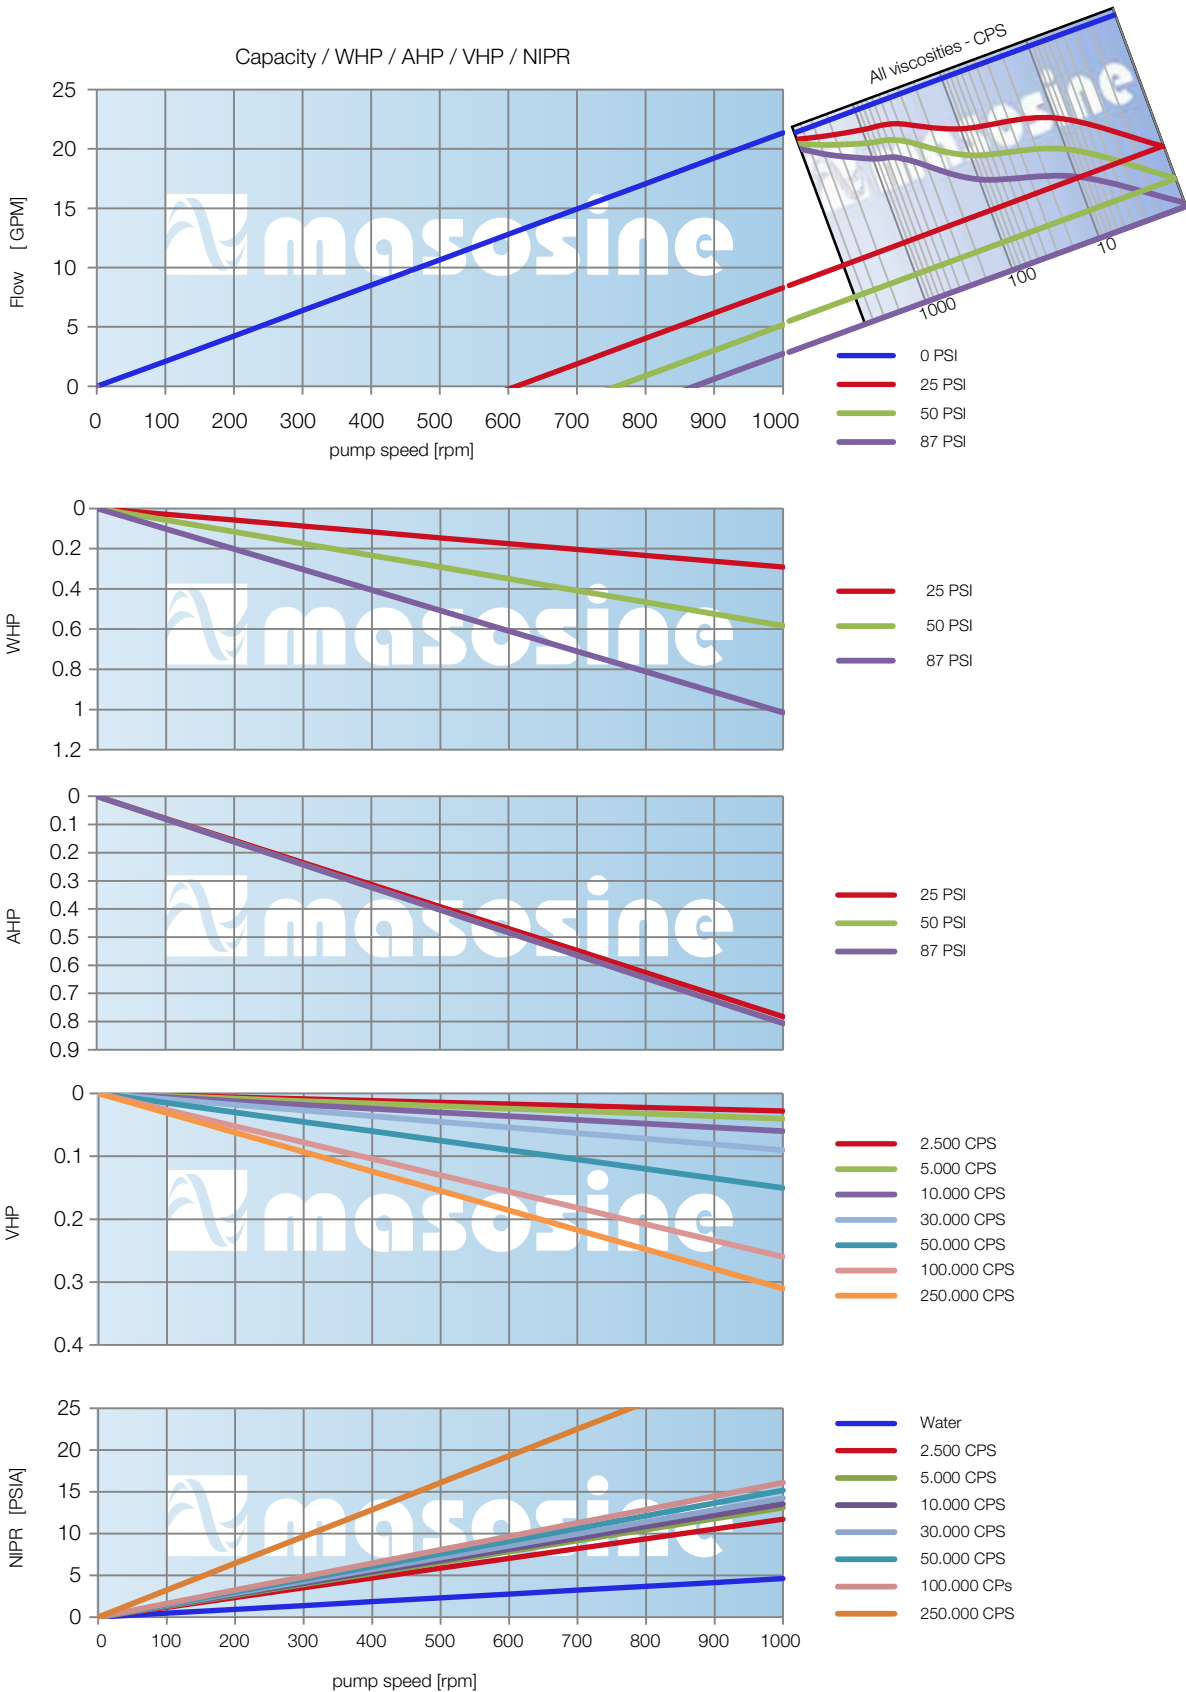




Sustainability curves

Certa Plus 200

Standard port size: DN50/2"
Displacement 0.03 gallons per revolution

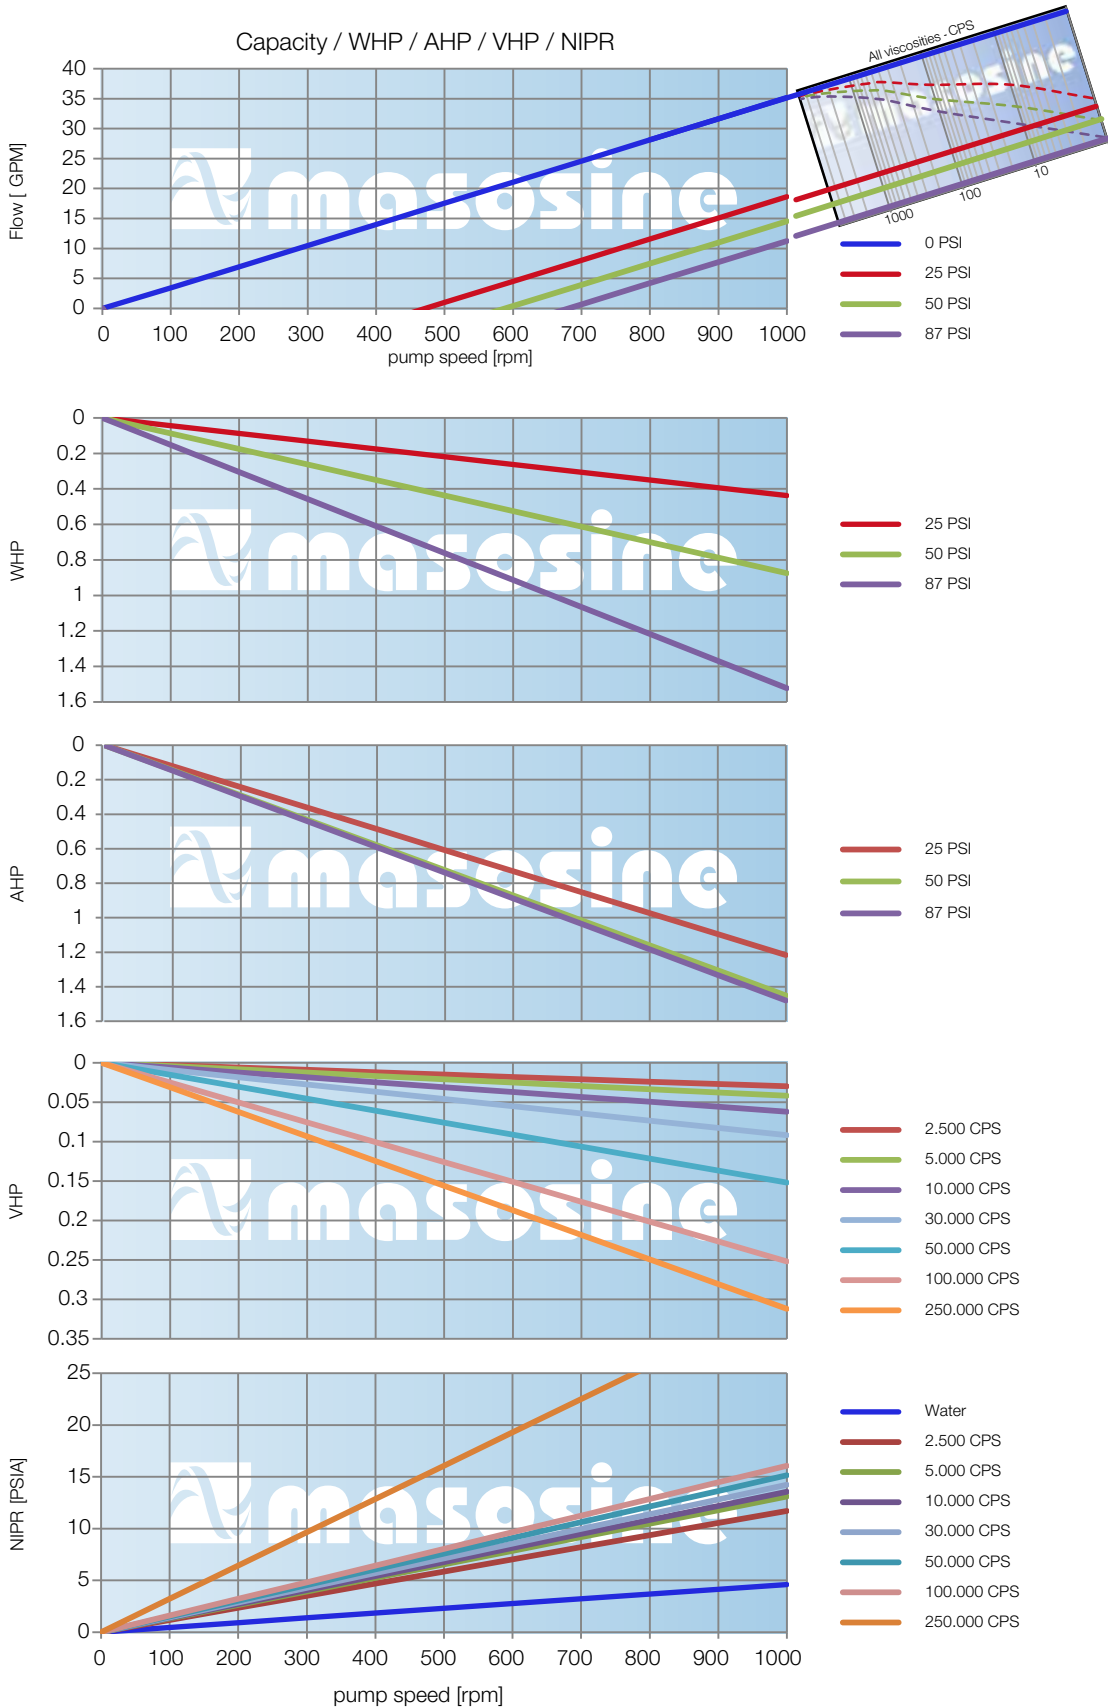






Sustainability curves


Certa Plus 250

Standard port size: DN65/2,5"
Displacement 0.06 gallons per revolution


Capacity / WHP / AHP / VHP / NIPR

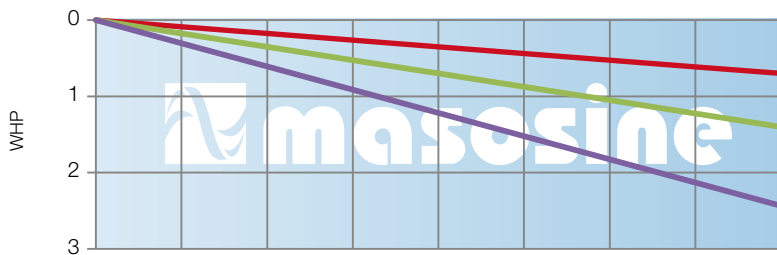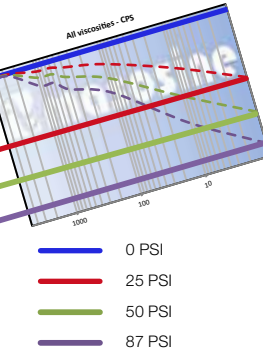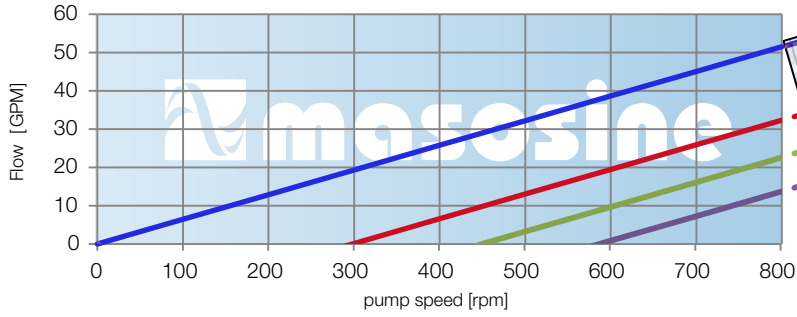


- 25 PSI
- 50 PSI
- 87 PSI

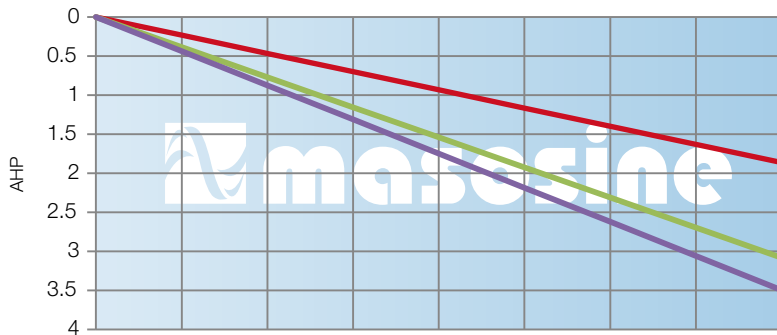

- 25 PSI
- 50 PSI
- 87 PSI

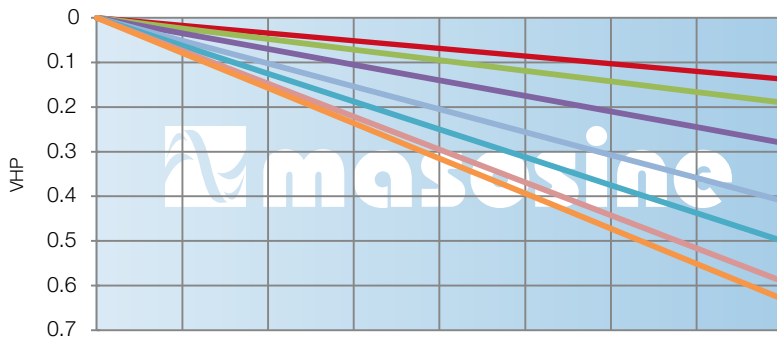

- 2.500 CPS
- 5.000 CPS
- 10.000 CPS
- 30.000 CPS
- 50.000 CPS
- 100.000 CPS
- 250.000 CPS

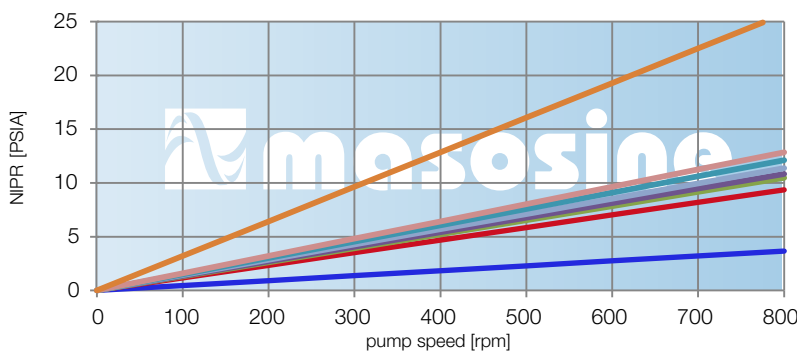


- Water
- 2.500 CPS
- 5.000 CPS
- 10.000 CPS
- 30.000 CPS
- 50.000 CPS
- 100.000 CPS
- 250.000 CPS



Sustainability curves

Certa Plus 300

Standard port size: DN80/3"
Displacement 0.13 gallons per revolution

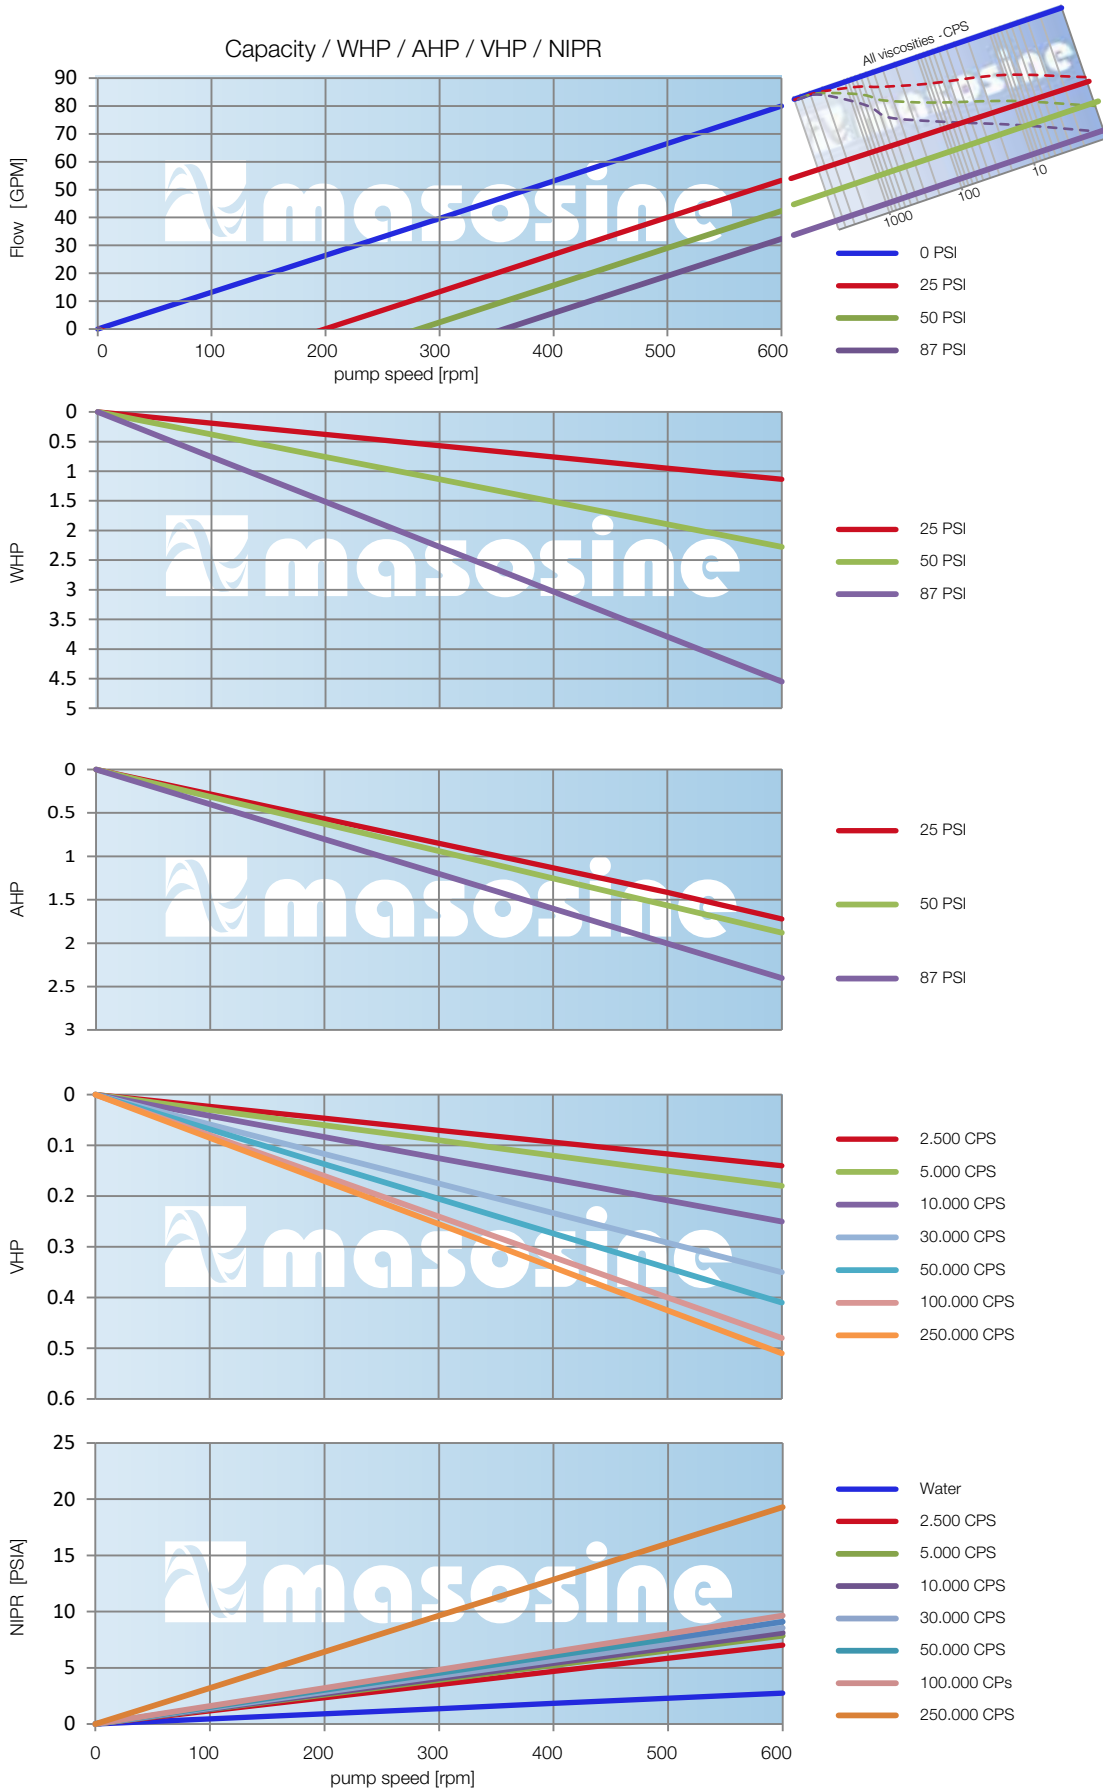



Sustainability curves

Certa Plus 400

Standard port size: DN100/4"
Displacement 0.31 gallons per revolution

