



# Food and beverage

Pumps · hose · tubing · fittings

## Industry experience

Watson-Marlow Fluid Technology Solutions has been firmly established within the food and beverage industry for decades as a leading supplier of peristaltic and Sine pump technology along with our hose, tubing, fillers, valves and gasket products. Our customers include the world's leading food and beverage producers.

By providing quality products, coupled with fluid management solutions and excellent customer service, we pride our business on developing partnering relationships with our customers.

Our diverse product range, backed by a global network of industry specialists, provides end-users with safe, effective equipment for these demanding environments.



## Directives and standards

The food and beverage processing and handling industry is subject to many directives and standards. This influences the design principles of our technology so we can ensure the reliability, safety and durability of our products and services.



## Cleaning

The cleaning process is a fundamental requirement of this industry. Our technology is designed with cleaning methods and suitable detergents in mind. For internal cleaning of processing systems, we design our components for CIP.

To guarantee the external cleaning procedure of our systems is effective, we design easy-to-clean hygienic solutions.



## Applications

	Sinusoidal pumps	Peristaltic hose pumps	Qdos peristaltic tube pumps	530, 630, 730 Peristaltic tube pumps	Tubing	Valves	Gaskets and PTFE hose
<b>Meat/Poultry</b>	MDM Whole breast Meat dough Sausage dough	MDM Offal	Wash treatment	Water treatment	Water treatment		✓
<b>Beverage</b>	Juice Syrup Concentrate	Juice	Flavorings Bottle filling Arabic gum dosing Water treatment	Flavorings Water treatment	Water treatment		✓
<b>Brewing</b>	Yeast harvest/ transfer Beer Liquid sugar	Diatomaceous earth Spent/waste yeast Malt/lime flavoring	Hops, Sugar dosing and fresh water conditioning	Finings dosing Sugar dosing Additives CIP chemicals	Finings dosing Sugar dosing Additives CIP chemicals		✓
<b>Dairy</b>	Curd and whey Cream cheese Butter Milk Yogurt Mozzarella	Waste	CIP chemicals H2O2 metering	Brine dosing Egg yolks Milk additives Yogurt additives CIP chemicals	Brine dosing Egg yolks Milk additives Yogurt additives CIP chemicals	Tank outlet Valves in lactic starter cultures production	✓
<b>Baking</b>	Dough Sponge Custard Batter Pie filling	Pie filling	Dyes	Egg glaze Sweeteners Icing Flavorings	Egg glaze Sweeteners Icing Flavorings		✓
<b>Confectionery</b>	Chocolate Caramel Inclusions	Water/waste treatment	Dyes Flavouring and coloring	Candy coating Flavoring, coloring	Candy coating Flavoring, coloring		✓
<b>Prepared food</b>	Ready meals Nut butters Salad dressings Sauces Soup/stews Tomato products	Deli salads Fruit, vegetable waste Beet/cane sugar Salsa Whole peaches	Vitamin addition viscosity modifiers	Food flavors, additives, coloring CIP chemicals	Food flavors, additives, coloring CIP chemicals	In-line valves	✓
<b>Fruit</b>	Berries Soft fruit Purées	Fruit preparations Whole/sectional fruit	Essence / additives	Fruit filling Soft fruit Essences and additives	Fruit filling Soft fruit Essences and additives		✓
<b>Fish</b>	Whole shell fish Fish fillets	Fish waste Live fry, fingerlings	Fish oil metering	Water treatment	Water treatment		✓
<b>Snack foods</b>				Flavorings and coloring CIP chemicals	Flavorings and coloring CIP chemicals		✓



Certa by MasoSine outperforms lobe pumps in critical food and beverage applications. The sinusoidal rotor design of our MasoSine pumps delivers a lower shear, gentle pumping action that safely transfers delicate food products without risk of degradation.

**Cleaner** than lobe pumps, certified up to EHEDG Type EL Aseptic Class I standard

**More efficient** than lobe pumps. Uses up to 50% less power

**Lower shear** than lobe pumps. Maintains final product quality

**Lower total cost of ownership** than lobe pumps. one shaft, one rotor, one seal and no timing gears

**Handles viscosity** better than lobe pumps. Best NIPR/ NPSHR in the market to reduce risk of cavitation



## MasoSine Certa pump

**Max flow:** 1124 GPM

**Max suction capability:** Can pull up to 85% of full vacuum/25.4 inHg

**Max discharge pressure:** 217 PSI

**Viscosities:** 1 cP to 8 million cP

**Certified:** EHEDG Type EL Class I and EHEDG Type EL Aseptic Class I, FDA and EC1935/2004 compliant, 3A Certified

## Sinusoidal pump design

A single sinusoidal rotor creates four evenly sized chambers. As each chamber rotates it gently conveys the fluid from the inlet port to the outlet port. At the same time, the opposite chamber opens to

draw in more fluid, resulting in a smooth flow with virtually no pulsation. A gate stops fluid flow from the higher pressure outlet to the low pressure inlet.






High maintenance diaphragm, rotary lobe, or progressive cavity pumps are unable to match the rugged, reliable 24/7 dependability of Bredel hose pumps.

- **Abrasive handling:** The product only contacts the hose, so no wear on the pump
- **Gentle handling of large particles:** No damage to shear sensitive products
- **Accurate metering:** Perfect dosing every time to ensure end product consistency
- **Easy maintenance:** Just change the hose
- **Seal-less, valve-less design:** Lowers total cost of ownership
- **FDA compliant**

## Bredel hose pump design

The pumping action results from alternately compressing and relaxing a machined hose between the pump housing and the compressing shoes. The fluid ahead of the shoe is pushed towards the discharge while the recovering hose behind the shoe draws more fluid in. With 100% compression at all

times, the pump does not slip, providing unbeatable metering accuracy and pressure performance. With no pump seals, seats or valves, abrasive slurries are no problem. With the fluid contacting only the inner wall of the hose, the pump is perfect for aggressive chemicals.

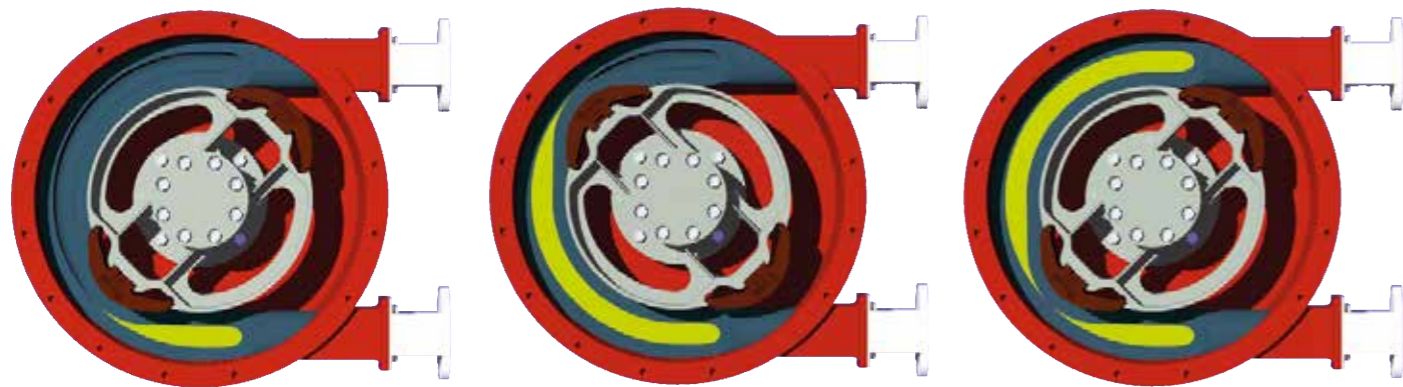

## Bredel series

**Max flow:** 475 GPM

**Max discharge pressure:** 232 PSI



## Clean-in-place (CIP) pumps

**Max flow:** 37 GPM

**Max discharge pressure:** 232 PSI



## APEX series

**Max flow:** 27 GPM

**Max discharge pressure:** 116 PSI



## Bredel hose options

### NBR for food

Suitable for a wide range of food products. Resistant to various cleaning chemicals. Meets EC 1935/2004

### F-NBR

Suitable for all food products including oils and greases. Meets EC1935/2004, FDA compliance 21CFR177.2600 and 3A standards



Peristaltic pumps can handle aggressive and shear sensitive fluids. The pumped fluid is totally contained within the tube, providing complete isolation of the fluid and no cross contamination.


- **Unrivalled accuracy:** Reduce waste and save money with high accuracy delivery
- **Low shear:** Superior to lobe pumps, no damage to fragile food products and improved final product quality
- **Easy clean:** NEMA 4X (IP66) for washdown
- **Reduce process downtime:** One-minute maintenance, just change the tube
- **Intuitive:** Operator control, color display and language selection

## Watson-Marlow peristaltic pump design

Rollers in a peristaltic pump compress the tube as they rotate, creating a vacuum which draws fluid through the tube.

Nothing but the pump tube touches the fluid, eliminating the risk of the pump contaminating the fluid, or the fluid contaminating the pump.

The complete closure of the tube when it is occluded (squeezed) between the roller and the track, gives the pump its positive displacement action, preventing backflow and eliminating the need for check-valves when the pump is not running.

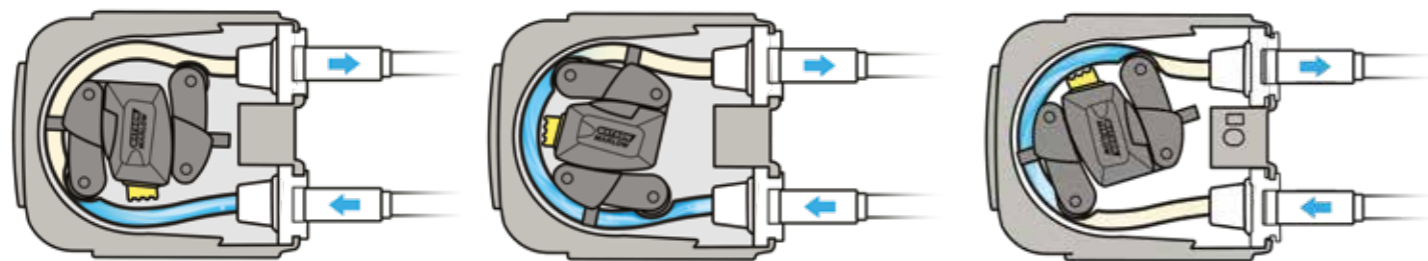

## 530 series

**Flow rates:** 0.0001 to 55 GPH

**Max discharge pressure:** 100 PSI



## 630 series

**Flow rates:** 0.0003 to 5 GPM

**Max discharge pressure:** 60 PSI



## 730 series

**Flow rates:** 0.0005 to 14.5 GPM

**Max discharge pressure:** 30 PSI



## Qdos

**Flow rates:** 0.001 to 32 GPH

**Max discharge pressure:** 100 PSI

Meets EC 1935/2004, EU regulation 10/2011 and FDA regulation 21CFR parts 170-199





## Filling Systems

**Flexicon**  
Liquid Filling

Our range of filling and capping machines from Flexicon suit many different sizes of bottles with multiple formats for sealing including crimp and screw capping.

They provide a simple and very flexible means of production which allows for a fast return on investment.

- Complete change over in less than five minutes
- Modular integration with existing peristaltic fillers and capping machines
- Systems fill bottles between 12 mm and 78 mm in diameter
- Fill volumes from 0.1 to 500 ml at up to 2000 fills per hour



## Maxthane

Long service life for flavor, color and additive dosing. Tubing elements are compatible with all types of vegetable oil and CIP chemicals.

- FDA regulations 21 CFR177.1680 compliance
- Meets EC1935/2004, EU regulation 10/2011

**WATSON  
MARLOW  
Tubing**



## Bioprene

Wide chemical compatibility and long service life with low gas permeability.

- Opaque to UV and visible light
- FDA regulations 21 CFR177.2600 compliance
- NSF/ANSI 61

**bio  
PURE**

## Gaskets



- Our sanitary gaskets are all compliant with FDA regulations CFR 21 177.2600
- USP Class VI compliant and animal derived component free (ADCF)
- Designed to achieve a smooth bore
- Advanced metal detectable gaskets are also available—automatically detect polymer decomposition inside your process line



## Valves

Our valves are designed to provide the highest level of reliability and safety.

- Tank, sample and in-line valve configurations available
- Simple tri-clamp assembly makes maintenance up to 80% faster
- Diaphragm materials include silicone, EPDM and PTFE
- Manual or pneumatic actuators, limit switches and solenoids
- Fully CIP/SIP capable for efficient cleaning and sterilizing
- Up to three ports for CIP/SIP or flushing while closed
- No adjustment or retightening required after installation

**ASEPco**



## PTFE hose

We are a world leader in PTFE-lined flexible hose. Our hoses contain our unique liner technology, “convoluted outside, smooth inside” for the combination of flow and flexibility, and an embedded “kink-proof” helical wire.

- Easy clean, shorter cycles. Avoiding costly downtime
- No CIP deterioration so no product contamination
- Kink proof and flexible hose. More than ten times the flex life of other PTFE lined hose
- Fewer hose changes with a long fatigue life results in a more economical product. Natural or anti-static patented PTFE liner
- Smooth bore for uninterrupted fluid flow and ease of cleaning
- High temperature and pressure capability
- Range of braid, cover and external protection options available
- FDA compliant, 3A and 1935 (10/2011) certified

**AFLEX HOSE**

**FOOD AND BEVERAGE SOLUTIONS**



**Watson-Marlow Fluid Technology Solutions**

Watson-Marlow Fluid Technology Solutions supports its customers locally through an extensive global network of direct sales operations and distributors

[wmfts.com/global](http://wmfts.com/global)

